


CD52-316SS

Stainless Steel Non-intrusive Magnetic Pig Passage Signaler

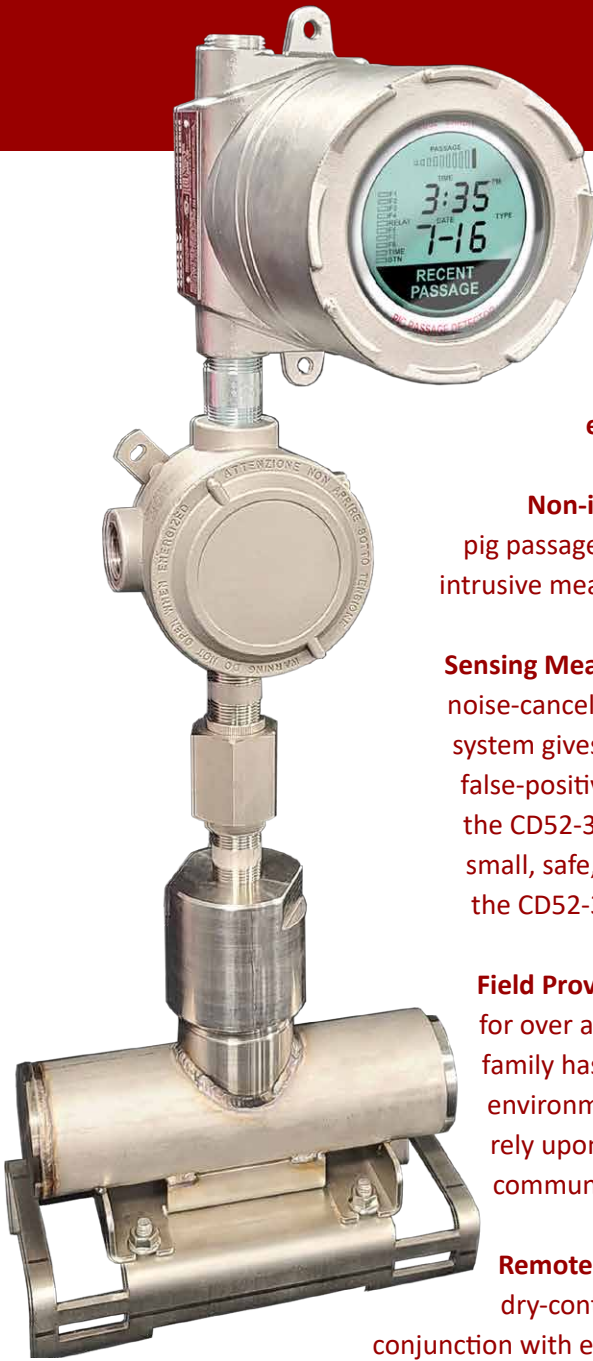

Harsh environments are a fact of life in the world of energy production. The CD52-316SS is CDI's field-proven non-intrusive pig signaler technology in a fully stainless steel ATEX IECEx-rated chassis.

All external surfaces of the CD52-316SS are made from corrosion-resistant 316 stainless steel, a material ideally suited for harsh offshore and desert environments.

Non-intrusive - The CD52 family of products provide quick and easy non-intrusive pig passage detection of any pig moving between 0.01 and 20 meters per second. Non-intrusive means less maintenance and corrosion, and no possibilities of pipeline leaks.

Sensing Means of the CD52-316SS consists of a set of patented, non-intrusive proprietary noise-canceling antennas invented by CDI specifically for pig passage detection. This antenna system gives the CD52-316SS its ability to reject nearby magnetic noise and halt costly false-positive triggering. With an antenna base measuring only 9.5 in. [241mm] in length, the CD52-316SS system may be deployed into very tight launcher and receiver locations. A small, safe, permanent magnet or active transmitter installed on a pig is all it takes to put the CD52-316SS system to work!

Field Proven - CDI has been manufacturing our patented CD52 family of pig signalers for over a decade. With thousands of systems installed around the globe, the CD52 family has a reliable performance record in burning deserts, frozen tundras, and every environment in between. Many of our customers are large oil and gas producers who rely upon the CD52 family of equipment to set valves, control pump stations, and communicate with SCADA systems.

Remote Signaling of a passage is easy with a built-in flashing LCD visual display and dry-contact relays. These normally-open or normally-closed relays may be used in conjunction with existing SCADA systems to integrate the CD52-316SS into a pipeline control and signaling network. An optional array of four high-luminosity LEDs (see page 2) can be seen over distances as great as 100 meters [328 feet].

Line or Battery Power - The CD52-316SS may be line or battery powered for greatest flexibility. Two standard D-cell alkaline batteries provide a full year of service. Changing batteries is as simple as opening the cabinet, unscrewing the face of the unit, removing the old batteries and inserting new ones.

1 YEAR
WARRANTY

CDI

www.pigging.com
(918) 258-6068
sales@pigging.com

CE
2813



**PIGGING PRODUCTS &
SERVICES ASSOCIATION**
member

CD52-316SS Stainless Steel Non-intrusive Magnetic Pig Passage Signaler

Conduit connections (2) are standard 3/4-in. NPT.
1/2-in. adapter or M20 options available.

Detachable Base makes installation and recovery simple. Just attach the base to the pipeline, then bolt the antenna assembly to the base.



Optional Array of four high-luminosity LEDs can be seen over distances as great as 100m (328 feet).



OPERATIONAL SPECIFICATIONS

Operational Principle:	Non-Intrusive Passive Magnetic
Sensor:	Patented* Noise-Canceling Wire-wound Antennas
Travel Direction:	Bi-Directional
Devices Detected:	Permanent Magnet or Electromagnetic Transmitter (X Series Transmitters or CD52 Permanent Magnets recommended)
Detection Speed:	0.01 meter/sec to 20 meter/sec
Passage Visual Indicator:	LCD blinks one hour after passage LCD holds steady for next 11 hours Auto-Resets at 12 hours
Passage Electrical Indicator:	Isolated Dry Contact Closure Relays
Pipeline Diameters:	3/4 in. to 60 in. [19 mm to 1,524] mm
Pipe Wall Thickness:	1.5 in. [38.1 mm] Maximum* * Where pipe wall thickness exceeds 1 in. [25.4 mm] a custom magnet may be required. Please Consult CDI for an evaluation of deployment options.
Temperature Range:	-40°C to 70°C (24VDC)

POWER SPECIFICATIONS

Source:	Two 1.5 VDC Alkaline D-Cell Batteries or 24 VDC External Power Note: DURACELL® PROCELL (PC1300) D-Cell alkaline batteries required by ATEX and/or IECEx standards to maintain system certification
Battery Life:	One Full Year Minimum (Alkaline)

CONSTRUCTION

Enclosure, Housing, and Mounting Assy:	316 Stainless Steel
Window:	Tempered Glass


OPTIONS

Sun Shade	Protection from heat generated by intense sunlight
Heater System	Recommended for operation below -22°F [-30°C]
Stainless Steel Tags	Marking tags engraved w/customer information
Remote Indicator System (RIS)	Provides visual passage indication up to 328 ft [100 m]
Cathodic Protection	Cathodic Protection insulation matting

SYSTEM CERTIFICATIONS

ATEX  II 2G Ex d mb IIB T5 Gb IP66 ERO21ATEX0004X

IECEx  Ex d mb IIB T5 Gb IP66 IECEx EMT 21.0004X

UKCA  Ex d mb IIB T5 Gb IP66 EMA21UKEX00053X

BANDIT VARIANTS

STANDARD



FLEX CABLE



PIPE EXTENSION



PORTABLE

